



Light Up the Green World . LED Downlights Expert 8 Years

2018 New LED Commercial Lighting Catalogue

1/2/3 Heads LED Grille Downlight



1: Model No.: DD004-1/2/3

Features: Anti-glare, UGR<19, Lens or Reflectors;

Material: Aluminum+Clear Glass Cover or Clear PC Cover

Model No.	Power	Lumen(lm)	Driver Brand	LED Brand	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
DD004-1-A	1*10W	1*850lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K 3000K 3500K 4000K 5000K	24°	>0.90	Ra>90	L125*W125	L105*W105
DD004-1-B	1*15W	1*1300lm							L145*W145	L125*W125
DD004-1-C	1*20W	1*1700lm							L165*W165	L145*W145
DD004-2-A	2*10W	2*850lm							L220*W125	L200*W105
DD004-2-B	2*15W	2*1300lm							L275*W145	L255*W125
DD004-2-C	2*20W	2*1700lm							L310*W165	L290*W145
DD004-3-A	3*10W	3*850lm							L320*W125	L300*W105
DD004-3-B	3*15W	3*1300lm							L395*W145	L375*W125
DD004-3-C	3*20W	3*1700lm							L425*W165	L405*W145

1/2 Heads Surface Mounted Downlight





2: Model No. SMDL004

Features: Finish Color White/Black Available, Lens or Reflector

Material: Aluminum+Clear Glass Cover/Clear PC Cover;

Model No.	Power	Lumen(lm)	Driver Brand	LED Brand	CCT(K)	Beam Angle	CRI	Size(mm)	Height(mm)
SMDL004-1-A	1*10W	1*850lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K 3000K 3500K 4000K 5000K	15° 24° 30°	RA>90	L100*W100	H100
SMDL004-1-B	1*15W	1*1300lm						L115*W115	H140
SMDL004-1-C	1*20W	1*1700lm						L130*W130	H160
SMDL004-1-D	1*30W	1*2600lm						L150*W150	H180
SMDL004-2-A	2*10W	2*850lm						L200*W100	H100
SMDL004-2-B	2*15W	2*1300lm						L230*W115	H140
SMDL004-2-C	2*20W	2*1700lm						L260*W130	H160
SMDL004-2-D	2*30W	2*2600lm						L300*W150	H180

Trimless 1/2 Heads Surface Mounted Downlights



3. Model No.: SMDL005

Features: Finish Color: Black or White Available;

Material: Aluminum+Clear Glass Cover/Clear PC Cover;

Model No.	Power	Lumen(lm)	Driver Brand	LED Brand	CCT(K)	Beam Angle	CRI	Size(mm)	Height(mm)
SMDL005-1-A	1*10W	1*850lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K 3000K 3500K 4000K 5000K	24° 38°	RA>90	L100*W100	H140
SMDL005-1-B	1*15W	1*1300lm						L120*W120	H160
SMDL005-1-C	1*20W	1*1700lm						L160*W160	H180
SMDL005-1-D	1*30W	1*2600lm						L160*W160	H180
SMDL005-2-A	2*10W	2*850lm						L200*W100	H140
SMDL005-2-B	2*15W	2*1300lm						L235*W120	H160
SMDL005-2-C	2*20W	2*1700lm						L325*W160	H180
SMDL005-2-D	2*30W	2*2600lm						L325*W160	H180



New Trimless 1/2 Heads LED Grille Downlight



4. **Model No.:** SMDL006

Features: No need to make holes, no need to fix, easy to install;

Material: Aluminum+Clear Glass Cover/Clear PC Cover;

Model No.	Power	Lumen(lm)	Driver Brand	LED Brand	CCT(K)	Beam Angle	CRI	Size(mm)	Height(mm)
SMDL006-1-A	1*10W	1*850lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K 3000K 3500K 4000K 5000K	24° 38°	RA>90	L77*W77	H140
SMDL006-1-B	1*12W	1*1000lm						L97*W97	H140
SMDL006-1-C	1*15W	1*1300lm						L117*W117	H140
SMDL006-1-D	1*20W	1*1700lm						L147*W147	H160
SMDL006-1-E	1*25W	1*2200lm						L147*W147	H160
SMDL006-2-A	2*10W	2*850lm						L160*W77	H140
SMDL006-2-B	2*12W	2*1000lm						L197*W97	H140
SMDL006-2-C	2*15W	2*1300lm						L240*W117	H140
SMDL006-2-D	2*20W	2*1700lm						L297*W147	H160
SMDL006-2-E	2*25W	2*2200lm						L297*W147	H160

New Trimless 1/2/3 Heads LED Grille Downlight



**5. Model No. DD005****Features:** Trimless Recessed LED Grille Downlight, Angi-glare**Material:** Aluminum+Clear Glass Cover/Clear PC Cover;

Model No.	Power	Lumen(lm)	Driver Brand	LED Brand	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
DD005-1-A	1*10W	1*850lm	Philips	CREE	2700K	24°	>0.90	Ra>90	L115*W115*H120	L118*W118
DD005-1-B	1*15W	1*1300lm	Tridonic	Citizen	3000K		L115*W115*H120		L118*W118	
DD005-2-A	2*10W	2*850lm	V.S .	Limiled	3500K		L245*W115*H120		L248*W118	
DD005-2-B	2*15W	2*1300lm	Driver		4000K		L245*W115*H120		L248*W118	
DD005-3-A	3*10W	3*850lm			5000K		L275*W95*H100		L277*W97	
DD005-3-B	3*15W	3*1300lm					L275*W95*H100		L277*W97	

NEW LED COB Downlight**6. Model No. TD081****Features:** Beam angle: 50/60° , Lens, new design;**Material:** Die-cast Aluminum+Lens;

Model No.	Power	Lumen(lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TD081-3.5F	15W	1300lm	Philips	CREE	2700K	50°	>0.90	Ra>90	φ115*H42	φ105
TD081-4F	20W	1700lm	Tridonic	Citizen	3000K	60°	φ142*H50		φ130	
TD003-6F	30W	2600lm	V.S .	Limiled	3500K		φ169*H58		φ155	
TD003-8F	40W	3400lm	Driver		4000K 5000K		φ217*H70		φ200	



Adjustable Spotlight



7. Model No. SPTD002

Features: Focus, Adjustable, Beam Angle: 15/24/36° ;

Material: Die-cast Aluminum+Lens;

Model No.	Power	Lumen(lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout (mm)
SPTD002-2.5F	10W	850lm	Philips	CREE	2700K	15°	>0.90	Ra>90	φ88*H83	φ75
SPTD002-3F	12W	1000lm	Tridonic	Citizen	3000K	24°			φ100*H95	φ85
SPTD002-4F	20W	1700lm	V.S . Driver	Limited	3500K 4000K 5000K	36°			φ125*H106	φ105

Deep Anti-glare LED Adjustable Downlight



8. Model No. ATD004

Features: Adjustable and Deep Anti-glare;

Material: Die-cast Aluminum+Lens;

Model No.	Power	Lumen(lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout (mm)
ATD004-3F	10W	850lm	Philips	CREE	2700K	15°	>0.90	Ra>90	D90*H85	φ75
ATD004-4F	20W	1700lm	Tridonic	Citizen	3000K				D108*H100	φ95
ATD005-5F	30W	2600lm	V.S . Driver	Limited	3500K				D138*H120	φ120
ATD005-6F	40W	3400lm			4000K 5000K				D160*H145	φ140



Waterproof IP67 LED Downlight



9. **Model No.:** NTD059

Features: Waterproof IP67, Optional baffle colors: White/Black/Silver/Golden;

Material: Die-cast Aluminum+Lens;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
NTD059-3F	10W	850lm	Waterproof Driver	CREE	2700K	45°	>0.90	Ra>90	D100*H75	φ90
NTD059-4F	20W	1700lm		Citizen	3000K	30°			D140*H90	φ130
NTD059-6F	30W	2600lm		Limiled	3500K				D185*H112	φ170
NTD059-8F	40W	3400lm			4000K 5000K				D230*H128	φ200

Adjustable Surface Mouted Downlight



10: **Model No.** ASMDL003-A;

Finish Color: White/Black;

Notes: It can be made as led track light, and 90° adjustable;

Material: Aluminum+Lens;

Model No.	Power	Lumen(lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	CRI	Size(mm)	Height(mm)
ASMDL003-A	10W	900lm	Philips Tridonic V.S. Driver	CREE Citizen Limiled	2700K	10°	RA>90	D90	H110
					3000K	20°			
ASMDL003-B	20W	1800lm			3500K	30°		D110	H120
					4000K 5000K				



Rotatable and Adjustable Downlights



11: Model No. DD003-1/2/3;

Product Name: Multiple Heads LED Downlight ;

Finish Color: White /Full Black;

Notes: The lamp can be 30° adjustable and 340° rotatable;

Material: Die-cast Aluminum+Lens;

Model No.	Power	Lumen(lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
DD003-1-A	1*10W	1000lm	Philips Tridonic V.S. Driver	CREE	2700K	24°	>0.90	Ra>90	L112*W112	L90*W90
DD003-1-B	1*20W	2000lm		CITIZEN	3000K				L138*W138	L120*W120
DD003-1-C	1*30W	3000lm		COB	3500K				L175*W175	L155*W155
DD003-2-A	2*10W	2*1000lm		5000K	L210*W112				L190*W90	

Model No.	Power	Lumen(lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
DD003-2-B	2*20W	2*2000lm	Philips Tridonic V.S. Driver	CREE	2700K	24°	>0.90	Ra>90	L250*W138	L230*W120
DD003-2-C	2*30W	2*3000lm		Citizen	3000K				L325*W175	L300*W155
DD003-3-A	3*10W	3*1000lm		Limiled	3500K				L282*W112	L260*W90
DD003-3-B	3*20W	3*2000lm		5000K	L363*W138				L345*W120	
DD003-3-C	3*30W	3*3000lm		L472*W175	L450*W155					



LED COB Downlight



12: Model No. TD051A

TD051B

TD051D

LED COB Downlight

Material: Die-cast Aluminum+Clear Glass Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TD051-2.5F	5W	400lm	Philips Tridonic V.S. Driver	CREE Citizen Limiled	2700K	50°	>0.90	Ra>90	φ89.7*H56	φ75
TD051-3F	9W	790lm			3000K				φ110*H68	φ90
TD051-4F	15W	1300lm			3500K				φ137.5*H82	φ120
TD051-5F	20W	1700lm			4000K				φ165*H91	φ140
TD051-6F	30W	2600lm			5000K				φ195*H107	φ170
TD051-8F	40W	3500lm			φ235*H127.5				φ200	



13: Model No. TD053A

TD053B

TD053C

IP54 COB Downlight;

Material: Die-cast Aluminum+Clear Glass Cover/Full Frosted Glass/Full Milky PC Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TD053-3F	10W	850lm	Philips Tridonic V.S. Driver	CREE Citizen Limiled	2700K	50°	>0.90	Ra>90	φ110*H61	φ95
TD053-4F	15W	1300lm			3000K				φ135*H69	φ110
TD053-5F	25W	2200lm			3500K				φ160*H75	φ130
TD053-6F	40W	3500lm			4000K				φ185*H100	φ165
TD053-8F	60W	4800lm			5000K				φ240*H120	φ205



14: Model No. TD033A
IP44 LED Downlight

TD033B

TD033C

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TD033-3F	9W	750lm	Philips Tridonic V.S. Driver	CREE Citizen Limiled	2700K	60°	>0.90	Ra>90	φ108*H52	φ95
TD033-4F	15W	1300lm			3000K				φ142*H65	φ125
TD033-5F	20W	1700lm			3500K				φ158*H75	φ140
TD033-6F	25W	2200lm			4000K				φ185*H88	φ170
TD033-8F	40W	3500lm			5000K				φ226*H108	φ210
TD033-10F	60W	5000lm			φ282*H130				φ265	



15: Model No. TD041;

Horn LED Downlight;

Material: Die-cast Aluminum+Clear Glass Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TD041-3F	9W	750lm	Philips Tridonic V.S. Driver	CREE Citizen Limiled	2700K	24°	>0.90	Ra>90	φ105*H90.5	φ95
TD041-4F	15W	1300lm			3000K	60°			φ139*H110.5	φ125
TD041-5F	25W	2200lm			3500K	φ162*H125.5			φ140	
TD041-6F	40W	3500lm			4000K	φ185*H145			φ170	
					5000K					



16: Model No. TD060

Product Name: LED COB Downlight;

Material: Die-cast Aluminum+Lens;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TD060-4F	20W	1800lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K	40°	>0.90	Ra>90	φ150*H80	φ130
TD060-6F	30W	2700lm			3000K				φ195*H100	φ175
TD060-8F	40W	3600lm			3500K 4000K 5000K				φ220*H110	φ200



17: Model No. TD056

LED Flat Downlight

Material: Die-cast Aluminum+Clear Glass Cover with Middle Dot/Full Frosted Glass Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TD056-4F	12W	100lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K	60°	>0.90	Ra>90	φ148*H63	φ125
TD056-6F	20W	1600lm			3000K				φ195*H63	φ168
TD056-8F	30W	2400lm			3500K				φ230*H63	φ190
TD056-10F	30W	2400lm			4000K 5000K				φ280*H88	φ195



18: Model No. TD057

LED Downlight with Lens (Max: 80W)

Material: Vehicle Aluminum Alloy+Lens/Clear Glass Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TD057-A	10W	1300lm	Philips	CREE	2700K	24°	>0.90	Ra>90	D115*H116	D95
TD057-B	20W	1700lm	Tridonic	Citizen	3000K	38°				
TD057-C	35W	2500lm	V.S . Driver	Limiled	3500K	60°			D160*H133	D140
TD057-D	40W	3400lm			4000K	D160*H133			D140	
TD057-E	50W	4300lm			5000K	D160*H153			D140	

Adjustable Downlights



19: Model No. ATD001

Adjustable LED Downlight

Material: Vehicle Aluminum Alloy+Clear Glass Cover/Clear PC Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout (mm)
ATD001-A	10W	850lm	Philips	CREE	2700K	24°	>0.90	Ra>90	D111*H88	D80
ATD001-B	15W	1300lm	Tridonic	Citizen	3000K	60°				
ATD001-C	20W	1700lm	V.S . Driver	Limiled	3500K	D142*H118			D110	
ATD001-D	30W	2500lm			4000K	D150*H126			D130	
ATD001-E	40W	3400lm			5000K	D180*H128			D145	
ATD001-F	50W	4300lm			D194*H129	D158				
ATD001-G	60W	5200lm			D233*H149	D210				



Adjustable LED Downlights



20: Model No. ATD003

Product Name: Adjustable LED Downlight;

Finish Color: Full Black/White+Black;

Notes: the led cover can be lens or clear glass cover;

Material: Die-cast Aluminum Alloy+Lens/Clear Glass Cover;

Model No.	Power	Lumen(lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout (mm)
ATD003-3F	10W	1000lm	Philips Tridonic V.S . Driver	CREE	2700K	24°	>0.90	Ra>90	φ90	φ75
ATD003-4F	20W	2000lm		Citizen	3000K				φ108	φ95
ATD003-5F	30W	3000lm		Limiled	3500K				φ138	φ120
ATD003-6F	40W	4000lm		4000K	φ160				φ140	
ATD003-8F	50W	5000lm		5000K	φ180				φ160	



Double Rings 360° Rotatable and 30° Adjustable Downlight



21: Model No. SD005-6F

Product Name: Double Rings Adjustable Downlight;

Material: Vehicle Aluminum Alloy+Clear Glass Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	CRI	Size(mm)	Cutout (mm)
SD005-4F	20W	1700lm	Philips	CREE	2700K	24°	RA>90	D140*H125	D120
SD005-6F	30W	2500lm	Tridonic	Citizen	3000K			D160*H130	D145
			V.S . Driver	Limited	3500K				
					4000K				
					5000K				

Module Engines with frame options





22. Model No.: JH-C13-10W and JH-C14-15W;

Fixtures: The module is fit to many kinds frame, picture showed above;

Material: Die-cast Aluminum Alloy and Clear PC Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	CRI	Size(mm)
JH-C13-10W	10W	850lm	Philips Tridonic	CREE Citizen	2700K	15°	RA>90	D50*H68
JH-C14-15W	15W	1300lm	V.S . Driver	Limiled	3000K 3500K 4000K 5000K	24° 40° 60°		D50*H78




23: Model No. TSD0810

Product Name: Oblique Square LED Downlight;

Material: Die-cast Aluminum Alloy and Clear PC Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	CRI	Size(mm)	Cutout(m m)
TSD0810-A	10W	850lm	Philips	CREE	2700K	24°	RA>90	SQ85*H110	L78*W78
TSD0810-B	15W	1300lm	Tridonic V.S . Driver	Citizen Limiled	3000K 3500K 4000K 5000K			SQ82*H118	L78*W78




Model No. DLM001-A

DLM001-B

DLM001-C

DLM001-D

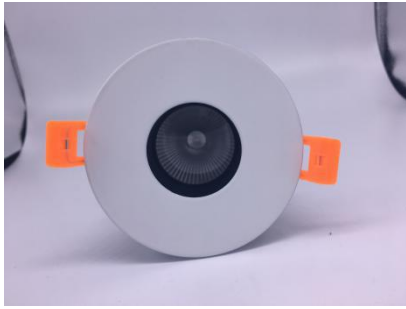

24: Model No. DLM001-E

DLM001-F

DLM001-C

LED Module Downlight ;

Features: Standard spotlight size. Can be installed into conventional spotlight frames

Material: Die-cast Aluminum Alloy and Clear PC Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout (mm)
DLM001-A	10W	850lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K 3000K 3500K 4000K 5000K	15° 24° 36°	>0.90	Ra>90	SQ95*H98	85*85
	15W	1300lm							SQ95*H103	
DLM001-B	10W	850lm							SQ105*H113	95*95
	15W	1300lm							SQ105*H118	
DLM001-C	10W	850lm							SQ95*H118	85*85
	15W	1300lm							SQ95*H123	
DLM001-D	10W	850lm							φ95*H98	φ85
	15W	1300lm							φ95*H103	
DLM001-E	10W	850lm							φ90*H105	φ80
	15W	1300lm							φ90*H110	
DLM001-F	10W	850lm	φ85*H105	φ77						
	15W	1300lm	φ85*H112							



Trimless Spotlight



25: Model No. DLM002 ;

Trimless Module Downlight White Or Black;

Material: Die-cast Aluminum Alloy and Clear PC Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
DLM002-A	10W	850lm	Philips	CREE	2700K	15°	>0.90	Ra>90	φ91*H115	φ92
DLM002-B	15W	1300lm	Tridonic	Citizen	3000K	24°				
			V.S. Driver	Limiled	3500K	38°				
					4000K	55°				
					5000K					

LED Linear Downlight





26: Model No. XTD-A

LED Linear Downlight with Trim;

Material: Die-cast Aluminum Alloy and Lens;

Model No.	Power	Lumen(l m)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
XTD-A-01	2W*1	150lm	Philips	Osram	3000K	15°	>0.90	Ra>90	45*45*H49	37*37
XTD-A-02	2W*2	300lm	Tridonic	SMD3030	4000K	30°			75*45*H49	68*37
XTD-A-05	2W*5	800lm	V.S. Driver	5000K	45°	147*45*H49			140*37	
XTD-A-10	2W*10	1700lm				280*45*H49			273*37	
XTD-A-15	2W*15	2500lm				415*45*H49			405*37	

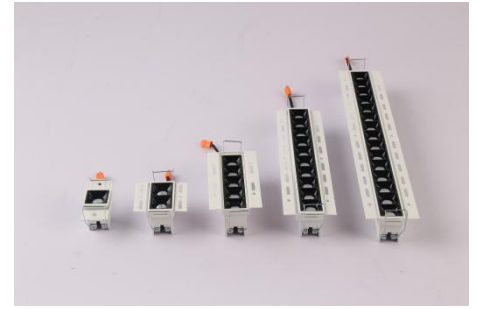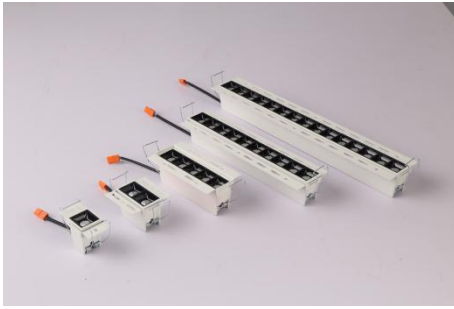

**27: Model No. XTD-B
Trimless Linear Downlight;**

Material: Die-cast Aluminum Alloy and Lens;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
XTD-B-01	2W*1	150lm	Philips	Osram	3000K	15°	>0.90	Ra>90	35*35*H49	42*42
XTD-B-02	2W*2	300lm	Tridonic	SMD3030	4000K	30°			65*35*H49	72*42
XTD-B-05	2W*5	800lm	V.S.	5000K	45°	138*35*H49			144*42	
XTD-B-10	2W*10	1700lm	Driver			270*35*H49			277*42	
XTD-B-15	2W*15	2500lm				403*35*H49			409*42	

Surface Mounted LED Downlight



28: Model No. RSMDL001

Product Name: Round Surface Mounted Downlight;

Material: Die-cast Aluminum Alloy and Clear PC Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Height(mm)
RSMDL001-3F	9W	750lm	Philips	CREE	2700K	24°	>0.90	Ra>90	D90	90
RSMDL001-4F	15W	1300lm	Tridonic	Citizen	3000K	45°			D110	120
RSMDL003-5F	25W	1700lm	V.S.	Limiled	3500K				D130	152
RSMDL003-6F	35W	2500lm	Driver		4000K 5000K				D170	185



29: Model No. SMDL002

Product Name: Square Surface Mounted Downlight;

Material: Die-cast Aluminum Alloy and Clear PC Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Height(mm)
SMDL002-4F	9W	750lm	Philips	CREE	2700K	24°	>0.90	Ra>90	90*90	90
SMDL002-5F	20W	1700lm	Tridonic	Citizen	3000K	45°			110*110	120
SMDL002-6F	30W	2500lm	V.S . Driver	Limiled	3500K				130*130	135
SMDL002-8F	40W	3300lm			4000K				160*160	165
					5000K					

LED Spot Downlight



30: Model No. TSD0808

Oblique Downlight Square;

Material: Die-cast Aluminum Alloy and Clear Glass Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
TSD0808-A	10W	800lm	Philips	CREE	2700K	24°	>0.90	Ra>90	SQ95*H98	80*80
TSD0808-B	15W	1200lm	Tridonic	Citizen	3000K				SQ115*H120	100*100
			V.S . Driver	Limiled	3500K					
					4000K					
					5000K					



31: Model No. TSD0803

Product Name: Round LED Spot Downlight;

Material: Die-cast Aluminum Alloy and Clear Glass Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout (mm)
TSD0803-A	10W	850lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K 3000K 3500K 4000K 5000K	24°	>0.90	Ra>90	D80*H90	D75
TSD0803-B	15W	1300lm							D100*H115	D90
TSD0803-C	20W	1700lm							D135*H145	D115

LED Gimbal Downlight



32: Model No. SD005

Product Name: LED Trunk Downlight;

Material: Die-cast Aluminum Alloy and Clear Glass/PC Cover;

Model No.	Power	Lumen(lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout(mm)
SD005-2.5F	10W	850lm	Philips Tridonic V.S . Driver	CREE Citizen Limiled	2700K 3000K 3500K 4000K 5000K	24° 38°	>0.90	Ra>90	D90*H70	D75
SD005-3F	15W	1300lm							D115*H125	D100
SD005-4F	25W	2200lm							D138*H120	D128
SD005-5F	35W	2900lm							D165*H155	D145
SD005-6F	40W	3500lm							D190*H165	D175



33: Model No. SD002

LED Gimbal Downlight;

Material: Die-cast Aluminum Alloy and Clear Glass Cover;

Model No.	Power	Lumen (lm)	Driver Brand	LED Style	CCT(K)	Beam Angle	Power Factor	CRI	Size(mm)	Cutout (mm)
SD002-2.5F	7W	550lm	Philips Tridonic V.S . Driver	CREE	2700K	24°	>0.90	Ra>90	φ85*H78	φ76
SD002-4F	15W	1300lm		Citizen	3000K				φ130*H110	φ120
SD002-5F	30W	2500lm		Limiled	3500K				φ165*H143	φ155
SD002-6F	40W	3500lm		4000K	5000K				φ190*H155	φ170